


MIXING

- Bottom and helix made of wear resistant STEEL HB400
- Rounded fixed safety grill complete with bag breaker
- Electric valve, hydraulic hoses + electric connection kit
- Attachment to the machine



MIXER BUCKET WITH CENTRAL DISCHARGE

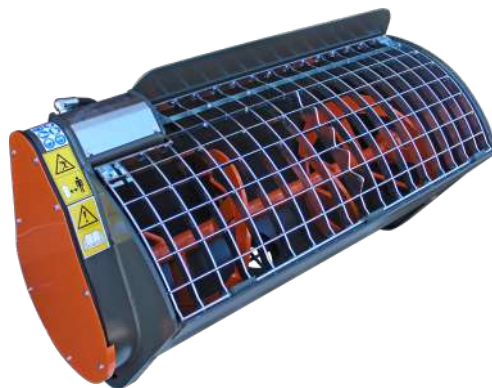

Welded helix made of wear steel HB400

Unloading pipe 1500mm length

Sintered steel seal group

Suitable for any type of earth moving machine:

Skid loader _____ 150/200/250/350/450

Backhoe loaders-Compact wheel loaders _____ BM450/600/700

Wheel loaders _____ BM1100/1500/2000

Telehandlers _____ 2,0/2,5 t BM350/450

3,0/3,5 t BM600

>4,5 t BM700

Excavators _____ starting from 3,5 t

MIXER BUCKET WITH SIDE DISCHARGE



Bolted helix made of wear steel HB400

Hydraulic motor fully protected

Unloading pipe (length 1500mm)

Bolted attachment as standard supply, starting from the class 3 models

Polyurethane seal group

Suitable for any type of earth moving machine:

Skid loader _____ BM100/150/200/250/330/400SL

Backhoe loaders-Compact wheel loaders _____ BM400/500/600SL

Wheel loaders _____ BM700/1100SL

Telehandlers _____ 2,0/2,5 t BM250/330/400SL

3,0/3,5 t BM500/600SL

>4,5 t BM700SL

Excavators _____ starting from 3,5 t

TWIN DOOR MIXER BUCKET



Bolted helix made of wear steel HB400

Hydraulic motor fully protected

Unloading pipe (length 1500mm) and side chute

Bolted attachment as standard supply, starting from the class 3 models

Polyurethane seal group

Suitable for any type of earth moving machine:

Skid loader _____ BM150/200/250/330/400TD

Backhoe loaders-Compact wheel loaders _____ BM400/500/600TD


Wheel loaders _____ BM700/1100TD

Telehandlers _____ 2,0/2,5 t BM250/330/400TD

3,0/3,5 t BM500/600TD

>4,5 t BM700TD

Excavators _____ starting from 3,5 t



DIMENSIONS

		BM 100 SL*	BM 150 SL	BM 200 SL	BM 250 SL	BM 330 SL	BM 400 SL	BM 500 SL	BM 600 SL	BM 700 SL	BM 1100 SL
A	Width	1180	1285	1490	1495	1605	1715	1795	1940	2090	2160
B	Depth	700	660	660	860	860	860	1075	1075	1075	1305
C	Height	560	645	645	800	800	800	1033	1033	1033	1250

The concrete mixer bucket M3 model SL is equipped with: safety rounded grill with bag splitter - BOTTOM and bolted HELIX made of wear steel HB400 - hydraulic motor fully protected - chain tensioner - electric valve with hydraulic hoses - electrical connection kit - hydraulic hoses - flat face couplings (only for SSL) - hydraulic opening of the bottom through a cylinder with covered rod - unloading pipe L=1500 mm.- attachment to the machine (bolted attachment as standard supply, starting from the model BM 500 SL).

By coupling the mixing bucket to the compact loaders, please consider the following: the operating load of the machine \geq the full load weight of the mixer bucket. In case the longitudinal and the horizontal distance of the center of gravity of the mixing bucket is lower than the one of the standard bucket (according to the data supplied by the manufacturer of the mixing bucket) it is possible to add the weight of the standard bucket to the operating load.

OPTIONALS

	Hydraulic opening of the safety grill including the safety valve.	Opening of the safety grill through gas springs including the safety valve.
Multi-Hitch option	Electric winder	Radio control for bottom opening without electric line
Bolted plate for excavator-direct coupling	8 / 14 pins connector	Side chute



MODEL	BM 100 SL*	BM 150 SL	BM 200 SL	BM 250 SL	BM 330 SL	BM 400 SL	BM 500 SL	BM 600 SL	BM 700 SL	BM 1100 SL
Class	-	1	1	2	2	2	3	3	3	4
Capacity [lt]	100	150	200	250	330	400	500	600	700	1100
Transmission	gear unit	chain	chain	chain	chain	chain	chain	chain	chain	chain
Empty weight [kg]	205	290	315	415	435	460	695	715	765	1030
Full load weight [kg]	445	650	795	1015	1227	1418	1895	2155	2445	3670
Min/max flow rate [lt/min]	25/70	30/60	30/60	40/75	35/75	35/75	70/150	70/150	70/150	100/115
Max pression cont/peak [bar]	140/225	175/225	175/225	175/225	210/300	210/300	150/310	150/310	150/310	205/330

* this mixer bucket is only available with the side discharge, without unloading pipe and electric valve.

