


MIXING

- Bottom and helix made of wear resistant STEEL HB400
- Rounded fixed safety grill complete with bag breaker
- Electric valve, hydraulic hoses + electric connection kit
- Attachment to the machine



MIXER BUCKET WITH CENTRAL DISCHARGE

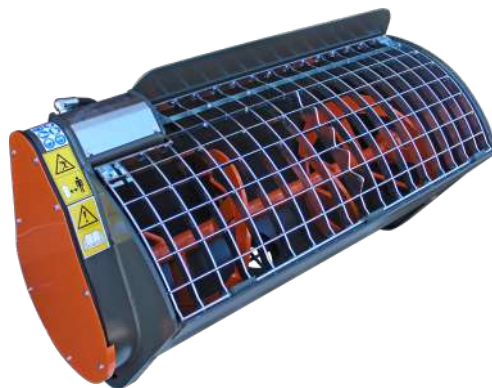

Welded helix made of wear steel HB400

Unloading pipe 1500mm length

Sintered steel seal group

Suitable for any type of earth moving machine:

Skid loader _____ 150/200/250/350/450

Backhoe loaders-Compact wheel loaders _____ BM450/600/700

Wheel loaders _____ BM1100/1500/2000

Telehandlers _____ 2,0/2,5 t BM350/450

3,0/3,5 t BM600

>4,5 t BM700

Excavators _____ starting from 3,5 t

MIXER BUCKET WITH SIDE DISCHARGE



Bolted helix made of wear steel HB400

Hydraulic motor fully protected

Unloading pipe (length 1500mm)

Bolted attachment as standard supply, starting from the class 3 models

Polyurethane seal group

Suitable for any type of earth moving machine:

Skid loader _____ BM100/150/200/250/330/400SL

Backhoe loaders-Compact wheel loaders _____ BM400/500/600SL

Wheel loaders _____ BM700/1100SL

Telehandlers _____ 2,0/2,5 t BM250/330/400SL

3,0/3,5 t BM500/600SL

>4,5 t BM700SL

Excavators _____ starting from 3,5 t

TWIN DOOR MIXER BUCKET



Bolted helix made of wear steel HB400

Hydraulic motor fully protected

Unloading pipe (length 1500mm) and side chute

Bolted attachment as standard supply, starting from the class 3 models

Polyurethane seal group

Suitable for any type of earth moving machine:

Skid loader _____ BM150/200/250/330/400TD

Backhoe loaders-Compact wheel loaders _____ BM400/500/600TD


Wheel loaders _____ BM700/1100TD

Telehandlers _____ 2,0/2,5 t BM250/330/400TD

3,0/3,5 t BM500/600TD

>4,5 t BM700TD

Excavators _____ starting from 3,5 t

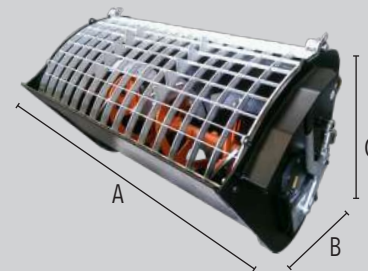

DIMENSIONS

		BM 150 TD	BM 200 TD	BM 250 TD	BM 330 TD	BM 400 TD	BM 500 TD	BM 600 TD	BM 700 TD	BM 1100 TD
A	Width	1350	1560	1560	1670	1780	1865	2010	2160	2280
B	Depth	660	660	860	860	860	1075	1075	1075	1305
C	Height	645	645	800	800	800	1033	1033	1033	1250

The concrete mixer bucket M3 model TD is equipped with: safety grill with bag splitter - BOTTOM and bolted HELIX made of wear resistant steel HB400 - hydraulic motor fully protected - chain tensioner - electric valve with hydraulic hoses - electric connection kit M3 - supply hoses - flat face couplings (only for SSL) - hydraulic opening of the bottom through a cylinder with covered rod - manually-operated side discharge - unloading pipe L=1500 mm - side chute extension - attachment to the machine (bolted attachment as standard supply starting from mod. BM500TD).

By coupling the mixing bucket to the compact loaders, please consider the following: the operating load of the machine \geq the full load weight of the mixer bucket. In case the longitudinal and the horizontal distance of the center of gravity of the mixing bucket is lower than the one of the standard bucket (according to the data supplied by the manufacturer of the mixing bucket) it is possible to add the weight of the standard bucket to the operating load.

OPTIONALS

	Opening of the safety grill through gas springs including the safety valve.	Radio control for bottom opening without electric line
Multi-Hitch option	Electric winder	Bolted plate for excavator-direct coupling



MODEL	BM 150 TD	BM 200 TD	BM 250 TD	BM 330 TD	BM 400 TD	BM 500 TD	BM 600 TD	BM 700 TD	BM 1100 TD
Class	1	1	2	2	2	3	3	3	4
Capacity [lt]	150	200	250	330	400	500	600	700	1100
Transmission	chain	chain	chain	chain	chain	chain	chain	chain	chain
Empty weight [kg]	310	335	435	455	480	720	740	790	1060
Full load weight [kg]	670	815	1035	1247	1440	1920	2180	2470	3700
Min/max flow rate [lt/min]	30/60	30/60	40/75	35/75	35/75	70/150	70/150	70/150	100/115
Max pression cont/peak [bar]	175/225	175/225	175/225	210/300	210/300	150/310	150/310	150/310	205/330

