




DIMENSIONS

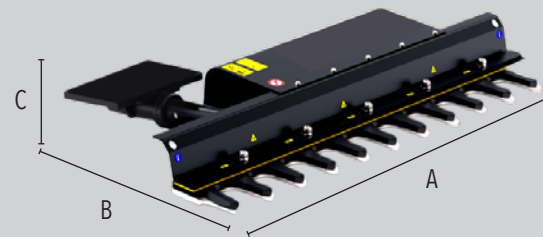

		MBT 50-150	MBT 50-180	MBT 50-210	MBT 100-158	MBT 100-188	MBT 100-218	MBT 150-160	MBT 150-190	MBT 150-220
A	Width	1600	1900	2200	1665	1965	2265	1715	2015	2315
B	Depth	231	231	231	231	231	231	231	231	231
C	Height	936	936	936	975	975	975	1014	1014	1014

- Sturdy structure
- Brass wear-resistant bar
- Blades in steel HB450
- Flow valve
- 360° swivel joint

The hedge trimmer M3 allows you to cut branches, hedges and brushes up to Ø 15 cm. Its sturdy structure allows continuous and heavy uses. The special milling, along with the specific inclination of the coupling tube, makes the branch entrance easier, ensuring a clean and precise cut. The ergonomic casing eases the uses in areas with thick vegetation. Suitable for excavators up to 20T and backhoe loaders.

Equipped with: flow valve, antishock valve, 360° swivel joint, blades in steel HB450, brass wear-resistant bar.

OPTIONAL

	Hydraulic fifth wheel	Hydraulic hoses
Bolted bracket*		

*The hedge trimmer is supplied with a flat drilled plate



MODEL	MBT 50-150	MBT 50-180	MBT 50-210	MBT 100-158	MBT 100-188	MBT 100-218	MBT 150-160	MBT 150-190	MBT 150-220
Width [cm]	150	180	210	158	188	218	160	190	220
Weight [kg]	195	208	223	230	250	260	260	280	290
Ø Cutting [mm]	5	5	5	10	10	10	15	15	15
Cuts/minute	200	200	200	84	84	84	63	63	63
Oil flow required* [lt/min]	60	60	60	60	60	60	60	60	60
Max pressure [bar]	250	250	250	250	250	250	250	250	250
Excavator weight [ton]	2,5-13	2,5-13	2,5-13	4-16	4-16	4-16	6,5-20	6,5-20	6,5-20

*min-max 40 – 110 l/min

